

Pump for pieces

HIGH PRESSURE HOMOGENIZERS AND PLUNGER PUMPS SINCE 1974

Powered By Interpump Group



MODEL PX33 Pump

Conceived with new modular design,
guarantees high flexibility.

MODEL	MAX. POWER	PRESSURE bar			CAPACITY l/h
		Pump	kW	25	
PX33	18,5	14.000	13.000	5.500	

*Values referring to machines with fixed capacity

**Values referring to products with a max viscosity of 500Cp

TECHNICAL DATA

Plunger number	3
Stroke (mm)	200
Weight (Kg)	3.000
Water consumption (l/h)	300
Lubrication oil quantity (kg)	25
Air and water inlet	7
Water discharge	½ female
Product inlet/outlet	Flange to weld 96x596 / Øe108



Design according to MACHINE DIRECTIVES and the HARMONIZED EUROPEAN STANDARD in force.



Pump for pieces

HIGH PRESSURE HOMOGENIZERS AND PLUNGER PUMPS SINCE 1974

Powered By Interpump Group

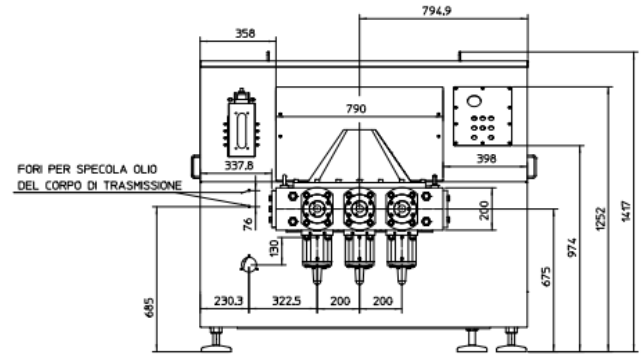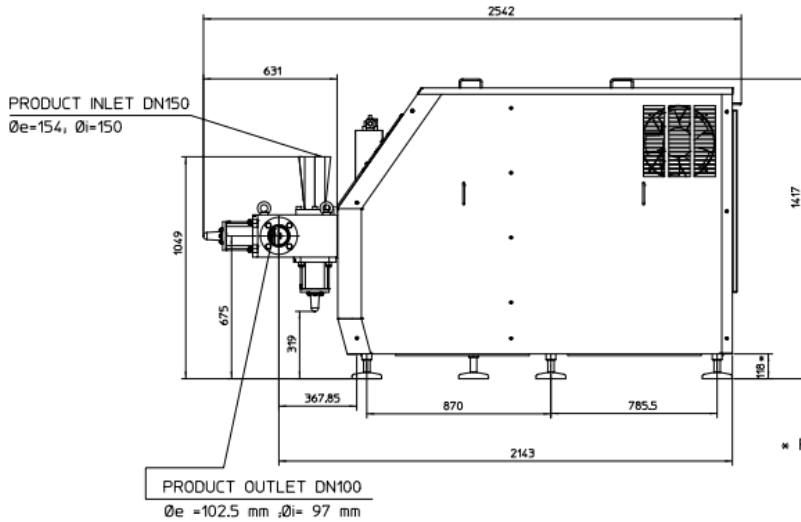

* POSSIBILITA' DI AUMENTO FINO A 190 mm

FEATURES

Duplex (SAF2205) mono block stainless steel compression head of high mechanical and corrosion resistance
Pumping pistons in special stainless steel of high mechanical resistance, heat-treated and chromed at thickness

Pumping group with stainless steel seat, polymeric material valves complete with pneumatic actuator to avoid stress of the product during the flow
Piston stroke retracted for a complete flow of the product with pieces

Transmission system with trapezoidal belts, pendular reducer and pulleys

Internal control system equipped with encoder and PLC for regulation phases of valve opening and closing according to actual flow rate

Operating panel on the machine for the control of all pump's parameters

Splash lubrication system

Pneumatic group equipped with lubrication oil level switch

Max. working pressure 25 bar

MAIN OPTIONS


Pumping pistons available in:
AISI 630 heat-treated (to pump products with high salt content)

- Max pressure up to 40 bar
- Max pressure up to 80 bar

Polymeric material gasket of high wear and corrosion resistance, for pressure higher than 25 bar

Electric board:

- External machine for variable capacity
- Frequency converter for flow regulation



***Technical specifications are not mandatory and subject to change without notice

REV2-11/23-EN

